机械颜色按实际为准、技术参数性能及特点如有更改,恕不另行通知。 Mechanical color according to the actual performance, technical parameters and features are subject to change without prior notice.



瑞安市嘉利特印刷包装机械有限公司 RUIAN GREAT PRINTING AND PACKAGING MACHINERY CO..LTD.

地址: 浙江省瑞安市经济开发区上东路88号

Add: No.88, Shangdong Road, Economic Development Zone,

Ruian City, Zhejiang, China. 电话(Tel): 0086-577-65171599 传真(Fax): 0086-577-65191028

E-mail: CSL167@163.com evawong@aliyun.com

www.rajlt.com





Since 1995

覆膜/上光

Film laminating/UV oil coating

Create Higher Value For Customers

为客户创造更高的价值



公司简介

嘉利特机械创立于1995年,不断引进欧洲制造设备理念,结合自身20多年的生产经验,我们始终如一致力于覆膜机、上光机系列产品的研发和创新,并为每一位用户提供优质高效的产品及优化合理的印后解决方案。

公司管理机制料学,运用ERP管理系统及5S标准,确保研发、采购、加工、生产装配、出厂检验及包装物流均有严格的制度保障。公司售后制度完善,国内一二线城市均设有设备直销及服务网点。公司技术团队随时为国外客户提供售后咨询、及时上门安装调试和故障排除服务。

Company Introduction

GREAT since from 1995. Continuous introduction the European concept of equipment manufacturing, based on more than 20 years experience, we focus on the development and innovation of laminating machine and UV coating machine, GREAT provide efficiency products and reasonable post press solution to every user.

Company structure is scientific and reasonable with humanized management mechanism.

The ERP management system and 5S standard are used to ensure the strict system of development, procurement, processing, production and assembly, factory inspection, packaging and logistics. Mature customer service system, the domestic First-tier and second-tier cities have direct selling and service branch, technical engineers team at any time provide after-sale consultation and arrangement installation and troubleshooting service for foreign customers.

Committed To Innovation, Intelligent Technology Change Life

致力于创新,智能科技改变生活

Keep listening to users' voices, Provide and share professional solutions

倾听用户的声音, 提供完美的印后工艺解决方法。









公司发展历程 Development process





03

瑞安市嘉利特机械公司成立。

RUIAN GREAT MACHINERY

COMPANY was established.

推出国内第一台自主研发生产的上光过 油机及对压光机进行升级改进。 Launched the first set of UV OIL coating machine in China market and upgrading the calendar machine.



上光过油机进行功能外观颠覆性的改 进,获得16项专利和浙江省优秀科技 奖,公司顺利通过IS9001-2000质量体 系认证。

The UV coating machine has been subversively improved, has won 16 patents and Province Excellent Science Technology Award. Company has passed the IS9001-2000 quality system certification.



公司自主研发设计全自动局部上光过

油机,获得浙江省科技三等奖。 Company has developed and designed the fully automatic spot UV coating machine and won the third rank of Province Science and Technology Award.





公司自主研发生产国内第一台油 加温式无胶覆膜机。

Company has developed and designed the first glue-less laminating machine. The first oil heating laminating machine was



公司名称变更为瑞安市嘉利特印刷 包装机械有限公司。立式水性干覆 两用覆膜机诞生,全自动立式覆膜 机量产。

Change the company to RUIAN GREAT PRINTING AND PACKAGING MACHINERY CO.,LTD. Vertical water gluing and dry laminating machine was born, automatic vertical laminating machine start mass production.



公司产品迅速覆盖中国市场并渗透 国外主流市场,高速立式覆膜机(链刀型)大规模生产,迎合市场新 旧更替的需求。嘉利特实现了品牌 的树立。

Company's products quickly cover the Chinese market and penetrate the mainstream foreign markets, high-speed vertical laminating machine (chain knife) mass production, to meet the needs of the market for new and old replacement. The JIALITE (GREAT) brand establishment stage is realized



2017-高端热刀全自动高速覆膜机量 产,荣获温州市科技创新项目,嘉 利特公司被指定为浙江省覆膜机研 发试点企业。2018年,公司通过国 家高新企业认定。

High-end hot knife automatic laminating machine with mass production, won Science and technology innovation project of Wenzhou city, Great company has become a R&D experimental enterprise of Zhejiang province. 2018, company is identified by national high-tech enterprises.

born in china market.

产品应用 Applications

Pharmaceutical packagir Greeting card Business card 手提袋 Tote bag

嘉利特应用领域 GREAT APPLICATION DOMAIN

嘉利特覆膜方案,

让印刷包装领域拥有更多的可能性 Great laminating solutions,

There are more possibilities for printing and packaging area.

嘉利特,我们值得被选择。

Great machinery, We deserve to be chosen.

我们通过多种产品,拓展市场



高产量首选

High-yield preferred High speed automatic

高速全自动覆膜机系列

laminating machine series











FM-B自动立式**覆**膜机 Automatic Vertical Laminating Machine







FM-H自动热刀覆膜机

Automatic Hot Knife

Laminating Machine



FM-E自动立式覆膜机

Laminating Machine

Automatic Vertical Type





经济之选

半自动覆膜机系列
The economic choice
Semi-automatic Laminating
Machine Series



Semi Automatic Vertical Laminating Machine



Semi Automatic Thermal Laminating Machine

FCD-1100链刀割纸机

FCD-1100链刀割 Chain Blade Cutting Machine



Hot Knife Cutting Machine











提升品质

上光机系列 Improve the quality Polishing Machine Series SA -1200 自动UV上光机 Full sheet automatic UV oil

Coating machine 250-600g

SE-1200 自动厚薄纸UV上光机

Full sheet automatic UV oil Coating machine 80-600g SE-1200 自动双机座UV上光机

Automatic double coator UV Oil varnishing machine

SA-1200 手动UV上光机 Manual UV Oil Coating Machine



FM Series

立式覆膜系列 Vertical Film Series

A Variety Of Models To Meet Your Various Production Needs

多种机型 满足您的各种生产需求

8 用油

FM 系列全自动覆膜机, 即涂、预涂两用型机型,作为专业的纸张覆膜设备, 适用于广告海报,绘本书刊杂志,资料册, 彩盒包装,日历台历,商务卡片等领域,提高产品档次,达到防尘防水防油的效果。是印刷包装企业,印后加工中心的理想选择。

B Usage

puts Du

FM vertical series fully automatic laminating machine (water base glue coating dry laminating and thermal laminating dual functions machine), as a professional equipment used for plastic film laminating on the surface of paper printed matter.

Widely applicable for laminating in advertising poster, Picture books and magazine, display book, color paper box, calendars, and commercial cards fields, Improving the printing matter grades, and achieve the purpose of dustproof, waterproof, oil proof. It's the best choice for printing and laminating enterprises of all scales.

■ 系列机型

FM 系列主要有三种机型: FM-B, FM-E, FM-H;

Series Model

FM vertical series include three type of model: FM-B, FM-E, FM-H:

纸张 Paper



88 机器配置

- 1、设备外观专业设计,烤漆工艺,经久耐用,美观大气。
- 2、不停机送纸机,立式两用覆膜主机,自动割纸机(圆盘刀割纸适用于普通BOPP,OPP膜),不停机自动收纸机。
- 3、割纸机可选配链刀、热刀系统,满足各种割膜断纸需求。
- 4、割纸机配有张力控制器,带弹跳功能,确保纸张平整不卷曲。
- 5、送纸机采用飞达气动输纸, 四吸四送吸盘, 平稳输送不同规格纸 张与快速送纸。
- 6、搭边装置采用侧拉规和伺服控制系统,精准稳定。
- 7、输送台板采用定制不锈钢波纹板。
- 8、热压辊采用电磁加热系统,温度均匀,加热高效节能,保证高品质 覆膜要求。
- 9、电器配置主要采用台湾台达电气控制系统、法国施耐德电器原件、 日本欧姆龙按钮及感应器。
- 10、辅助推车升降换膜,实现单人独立操作。

□ 可选配置

链刀分切,热刀分切,除粉,开窗覆膜,双面覆膜,双道热压覆膜,多卷多段膜覆膜,电晕处理装置,静电消除。

Main Configuration

Equipment appearance professional industrial design, spray-paint process, Practical and beautiful.
 Non stop Feeder, vertical dual functions laminator, automatic slitting (round knife suitable for OPP, BOPP). automatic collector.

3.The cutting device can be selected with chain knife and hot knife system, meet the needs of all kinds of film cutting.

4.The cutting device with a tension controller, bouncing function, ensure paper flat and unwinding. 5.High quality pneumatic conveying paper feeder with 4 suckers for lifting paper and 4 suckers for conveying paper to ensure stable and fast paper feeding.

6. Overlap device is controlled by side pull gauge and servo motor, ensure accuracy.

7. Paper conveying plate with customize corrugated stainless steel plate.


8. The hot press roller adopts electromagnetic heating system, uniform temperature, high efficiency and energy saving, it will ensure high quality products' film laminating requirements.

9. The electrical configuration mainly adopts the Taiwan Delta electrical control system and the French Schneider electric appliance.

10. Auxiliary cart lifting changing roll film, Single person independent operation.

Option Configuration

Chain knife, Hot knife, Dust remover, Window patching laminating, Double side laminating, Double heating press laminating, Multi rolls film laminating, Corona device, remove static device.







◎ 自动热刀覆膜机

智能科技实现完美操控体验。 全能一体机,伺服飞达,自动 调节纸张尺寸! Dual function Machine, Servo Feida, Automatic adjustment of paper size. Intelligent technology for a perfect control experience!

SPEED 10-90 m/min



FM-EH1080 Automatic Hot Knife Laminating Machine (Powder Remover)

◎ 自动热刀覆膜机(除粉)

全能一体机,高效、极致, 智能科技实现完美操控体验! All-in-one machine, efficient and extreme,Intelligent technology for a perfect control experience!

SPEED 10-80 m/min



Automatic Vertical
Type Laminating Machine (Chain Knife)

◎ 自动立式覆膜机(链刀)

精益生产,人性化设计 尽享简便易用性 Lean production, humanized design enjoy ease of use SPEED 10-80 m/min



◎ 自动立式覆膜机

为您的生产奠定完美的开局 无与伦比的灵活性和覆膜品质 Make the perfect start for your production Unparalleled flexibility and film quality

SPEED 10-70 m/min





瑞安市嘉利特印刷包装机械有限公司 www.rajlt.com



FM-1080 FM Automatic Vertical Laminating Machine (Double hot roller pressing)

◎ 自动立式双热压辊覆膜机





FM-800/1080/1280

立式覆膜系列技术参数

Series Vertical Automatic Laminating Machine

常规参数 General parameters

The second secon					
型号	Model	FM-H	FM-E	FM-B	
最大纸张规格	FM-800-Max. paper size-mm	780X880	780X880	780X880	
最小纸张规格	FM-800-Min. paper size-mm	350×270	350×270	350×270	
最大纸张规格	FM-1080-Max. paper size-mm	1080×1100	1080×1100	1080×1100	
最小纸张规格	FM-1080-Min. paper size-mm	360×290	360×290	360×290	
最大纸张规格	FM-1280-Max. paper size-mm	1280×1250	1280×1250	1280×1250	
最小纸张规格	FM-1280-Min. paper size-mm	360×290	360×290	360×290	
速度	Speed-m/min	10-90	10-80	10-70	
纸张厚度	Paper thickness-g/m ²	80-500	80-500	80-500	
搭口精度	Overlap precision-mm	<±2	≤±2	≤±2	
无胶膜厚度	Film thickness	10/12/15	10/12/15	10/12/15	
	(common micrometer)				
涂胶厚度	Common glue thickness-g/m ²	4-10	4-10	4-10	
预涂膜规格	Pre-gluing film thickness-g/m ²	1005,1006,1206			
		(1508 and 1208 for deep embossing paper)			
不停机送纸高度	Non-stop Feeding height-mm	1150	1150	1150	
不停机收纸高度(含托盘)	Collector paper height(incl. pallet)-mm	1050	1050	1050	
主电机功率	Main motor power-kw	5	5	5	
整机功率	Whole machine power-kw	65	65	60	
工作功率	Working power-kw		35-45		
电压	Voltage-V	380V-50Hz-3P			
工作压力	Roll working pressure-Mpa	15	15	15	
压缩空气	Air pressure requirement-Bar	1.0	1.0	1.0	
用气量	Air consumption-m3/h	80	80	80	
电线粗细	Cable thickness-mm ²	25	25	25	

整机安装尺寸 Installation size

No	Model	FM-H	FM-E	FM-B
FM-800				
A总长	Overall length-mm	7400	7400	7400
B总宽	Overall width-mm	1900	1900	1900
C总高	Overall height-mm	2700	2600	2400
毛重	Gross weight	7800	7600	7200
净重	Net weight	7500	7300	6900

Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米

FM-1080

A 总长	Overall length-mm	8400	8400	8400
B总宽	Overall width-mm	2200	2200	2200
C总高	Overall height-mm	3000	2800	2600
毛重	Gross weight	9800	9000	8000
净重	Net weight	9200	8600	7600

Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米

FM-1280

A 总长	Overall length-mm	8800	8800	8800
B总宽	Overall width-mm	2400	2400	2400
C总高	Overall height-mm	2700	2600	2400
毛重	Gross weight	10000	9800	9300
净重	Net weight	9500	9300	8800

Non-stop feeding paper pile rail space with 2m 不停机送纸堆轨道预留2米

选配单元安装尺寸 Option unit installation size

名称	FM-1080	长宽高 LxWxH(mm)	N.W/G.W/KGS
除粉部	Dust remover unit	1150x1800x1500	900/1000
开窗覆膜部	Window laminating	2130x1920x1500	800/900
圆刀割纸部	Round knife unit	1150x1800x1700	800/900
链刀割纸部	Chain knife unit	1950x1800x1750	1000/1100
热刀割纸部	Hot knife unit	1650x1800x1600	1000/1100
双道热压	Double hot roller press	600X1800X1650	800/900

嘉利特,从客户的视角出发,为客户提供新的商业机遇。

Great Machinery Could Provides New Business Opportunities From The Perspective Of Customers.

★热刀割纸最小尺寸(Hot knife paper min size): 360x320mm ★链刀割纸最小尺寸(Chain knife paper min size): 360x290mm

瑞安市嘉利特印刷包装机械有限公司 www.railt.com

配置项目 CONFIGURATIONS


FEEDING UNIT 送纸部

Jet-feeding Mode
High Speed Feeder
Feeder servo driver
Becker Vacuum Pump
Pre Stack Device Non Stop Feeding Paper
Overlap Side Gauge&servo Control
Motor Control
Laying Paper Plate With Max & Min Limited
Dust Remover Unit
Window Laminating Unit (Coating & Drying)

FM-H	FM-E	FM-B
•	•	0
	0	
	0	0
•		
	0	0
	0	0
•	•	•
0	0	0
0	0	0

压合主机 LAMINATING UNIT

辅助加热烘箱	Auxiliary heating oven
干燥辊直径	Dry roller diameter
干燥辊电磁加热	Dry roller Electromagnetic heating system
智能恒温系统	Intelligent constant temperature system
烘箱气动开启	Auxiliary oven pneumatic opening
加热辊镀铬处理	Heating roll with Chromium treatment
电磁加热系统	Electromagnetic heating system
橡胶压力辊	Rubber pressure roll
压力自动调节	Pressure automatic adjustment
主机链条台湾KMC	Driver Chain KMC-Taiwan
缺张检测	Paper miss detection
上胶系统特氟龙处理	Gluing system Teflon treatment
自动润滑	Automatic lubrication & cooling
可移动触摸屏控制面板	Removable touch screen control board
辅助叉车	Auxiliary cart lifting
多段覆膜滑差轴	Multi roll film working-Slip axis
双道热压辊筒	Double hot roller press
涂胶/计量辊独立电机控制	Gluing rollers Independent control





热刀 Hot knife



Round knife



贴窗覆膜 Window laminating



链刀 Chain knife



双压辊 Double pressure roller



Powder remover

割纸部 Automatic Cutting unit	割纸部	Automat	tic Cutt	ing unit
----------------------------	-----	----------------	----------	----------

	AND THE RESERVE OF THE PROPERTY OF THE PARTY		I I V I	I IVI D
圆刀装置	Round knife unit	•	•	•
链刀装置	Chain knife unit	0	0	0
热刀装置	Hot knife unit	0	0	0
砂带断膜装置	Sand belt break film device	•	•	•
弹跳装置防纸张卷曲	Bounce roller anti paper curling	•	•	•
螺杆式空气压缩机	Screw type air compressor	0	0	0

EM-H

EM-E

FM-B

自动不信机 收纸部 Delivery unit

目动不停机收纸部 Delivery unit			FM-E	F
不间断收纸	Non stop delivery	•	•	
气动拍打齐纸装置	Pneumatic patting and collecting structure	•		
纸张计数器	Sheet counter		•	
光电感应落纸台下降	Photoelectric induction paper board fall			
自动减速收纸功能	Automatic deceleration paper collect	•	0	

电气控制部 Electronic parts

高品质电气原件	High quality electric components	OMRON/SCHNEIDER
控制系统	Controller system	Delta-Taiwan & Rexroth
伺服电机	Servo motor	Weikeda-German technology
主操作屏	Main Monitor touch screen-14 inch	Samkoon-Japanese technology
链刀热刀操作屏	Chain knife & hot knife touch screen-7 inch	Samkoon-Japanese technology
变频器	Inverter	Delta-Taiwan & Rexroth
传感器/编码器	Sensor/Encoder	Omron-Japan
按钮开关	Switch	Schneider-French

气动原件 Pneumatic components

气动配件	Parts	Airtac-Taiwan

轴承 Bearing

主要轴承	Main bearing	NSK-Japan	
	LEXTERNAL CONTROL OF CONTROL	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	

注: "●" common standard 标配 "◎" option standard 选配



电脑控制界面 Computer control interface High Speed Feeder



高速飞达送纸



拉规 Pull gauge



Pneumatic parts

合作伙伴 Partner

















FY-B Automatic Thermal Film Laminating Machine

◎ 自动预涂膜覆膜机

First-class Cost Control. **Ensure Your Earnings Ideal Equipment** To Reduce Process Costs

工业印刷商用覆膜经济之选



♠ MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	FY-800B	FY-1080B	FY-1280B
Max. paper size-mm	最大纸张规格mm	780X880	1080X1100	1280X1250
Min. paper size-mm	最小纸张规格mm	350×270	350×290	350×290
Speed-m/min	速 度m/min	10-110	10-110	10-110
Paper thickness-g/m ²	纸张厚度gms	80-500	80-500	80-500
Overlap precision-mm	纸张搭口	≤±2	≤±2	≤±2
Film thickness	预涂膜规格	1005,1006,1206		
(common micrometer)		(1508 and 1208 for	deep embossing p	oaper)
Non-stop Feeding height-mm	不停机送纸高度mm	1150	1150	1150
Collector paper height	不停机收纸高度mm	1050	1050	1050
(incl. pallet)-mm	(含托盘)			
Main motor power-kw	主电机功率kw	5.5	5.5	5.5
Whole machine power-kw	整机功率kw	35	35	35
Working power-kw	工作功率kw	25-28	25-28	25-28
Voltage-V	电 压	380V-50Hz-3P	380V-50Hz-3P	380V-50Hz-3P
Roll working pressure-Mpa	工作压力Mpa	15	15	15
Air pressure requirement-m³/min	压缩空气m³/min	1.0	1.0	1.0
Cable thickness-mm ²	电线粗细m ²	16	16	16

Remark: We could accept customize large size. 备注:接受各大规格设备定制。 *热刀割纸最小尺寸(Hot knife paper min size): 360x320mm *链刀割纸最小尺寸(Chain knife paper min size): 360x290mm

♣ INSTALLATION SIZE 整机安装尺寸

Model	No	FY-800B	FY-1080B	FY-1280B
Overall length-mm	A 总长	7000	8100	8500
Overall width-mm	B 总宽	1900	2200	2400
Overall height-mm	C总高	2100	2100	2100
Gross weight	毛重	6500	7500	8500
Net weight	净重	6000	7000	8000

₩ 用途:

FY 系列全自动覆膜机, 预涂型覆膜机, 作为专业的 纸张覆膜设备,适用于广告海报,绘本书刊杂志,资 料册,彩盒包装,日历台历,商务卡片等工业印刷印 后及商业印刷印后加工领域,提高产品档次,达到防 尘防水防油的效果。

[™] Usage

FY series pre-coat glue automatic thermal laminating machine as a professional equipment used for plastic film laminating on the surface of paper printed matter. Widely applicable for laminating in advertising poster, Picture books and magazine, display book, color paper box, calendars, and commercial cards fields, Improving the printing matter grades, and achieve the purpose of dustproof, waterproof, oil proof.

瑞安市嘉利特印刷包装机械有限公司

FC-1100 Automatic Cutting Machine

② 自动割纸机



FCC-1100 自动割纸机 Flying Knife Slitting Machine



FCD-1100 链刀割纸机 Chain Knife Slitting Machine (Suitable PET PVC)



FCH-1100 热刀割纸机 Hot Knife Cutting Machine

← MAIN TECHNICAL PARAMETERS 主要技术参数


A CHARLES OF STREET OF STREET OF STREET	2 NO. SPANIE SANSTERNA DE LES MANTES DE CENTRE DE COMPANION DE MANTES DE CONTRACTOR DE			
型号	Model	FCC-1100	FCD-1100	FCH-1100
最大割纸宽度	Paper Cutting Width	1050mm	1050mm	1050mm
印张厚度	Printed Sheet Thickness	≥128g	≥128g	≥128g
加工有限长度	Processing Limited Length	280-880mm	280-880mm	280-880mm
电机功率	Motor Power	1.5kw	2.2kw	4.2kw
外形尺寸	Overall Dimensions	2200×1800×1100mm	1200×1800×1650mm	1650×1800×1600mm
重量	Weight	1000kg	1000kg	1100kg

Remark: We could accept customize large size. 备注:接收各大规格设备定制。



Ruian Great Printing & Packaging Machinery Co., Ltd www.railt.com

SE-1200 Automatic UV Oil Coating Machine











SE/SA系列上光机,主要用来对纸张表面进行上油涂层修饰纸张表面作用,可以做水性油,UV油和吸塑油上光,涂布平整细腻,节省光油又能达到产品高品质要求。SE型号采 用记忆式PLC控制的风刀系统。机器外形美观、性能稳定可靠、操作简单方便、自动化程度高等特点。

USAGE

SE/SA series UV oil coating machine which is suitable for the varnishing and polishing process of various paper (80-600g/m²), machine for water-based oil, UV oil and blister varnish oil coating, after processing the print surface has the damp-proof and water-proof effects. Machine adopts the reversing mechanism to make the oil layer smooth and fine, save varnish oil and meets the high quality requirements.

SE model adopts air knife system which controlled by memory type PLC. It has the characteristics of beautiful appearance, stable and reliable performance, simple and convenient operation and high automation degree.

♠ MAIN TECHNICAL PARAMETERS 主要技术参数

Model	型号	SE-1200 Automatic (Air knife)	SA-1200 Automatic	SE-1200M manual(Air knife)	SA-1200M manual
Max paper size-mm	纸张最大尺寸	1150×1100	1150×1100	*	*
Min paper size-mm	纸张最小尺寸	390×320	390×320	*	*
Length of Roller	辊筒长度	1250mm	1250mm	1250mm	1250mm
Paper Thickness-g/m ²	纸张厚度	80-600	250-600	80-600	250-600
Working speed	工作速度	10-80m/min	10-80m/min	*	*
Feeding paper pile height	送纸堆高度	1150mm	1150mm	*	*
Collecting paper pile height	收纸堆高度	1050mm	1050mm	*	*
Voltage	电压	380V 50Hz 3P	80V 50Hz 3P	80V 50Hz 3P	80V 50Hz 3P
Motor power-kw	主电机功率	3.5	2.5	3.5	2.5
Total standby power-kw	待机功率	70kw	70kw	65kw	65kw
Infrared Heating Power	红外灯管	1.2kw×18pcs	1.2kw×18pcs	1.2kw×18pcs	1.2kw×18pcs
Ultraviolet Heating Power	紫外灯管	3×8kw or 2×8kw	3×8kw or 2×8kw	3×8kw or 2×8kw	3×8kw or 2×8kw
Machine Weight-kg	机器重量	4500	3800	3200	2800
Overall Dimension-mm	机器尺寸	11800×2000×1800	$10800 \times 1800 \times 1750$	9800×2000×1600	8700×1800×1450
Oil type	油品类型	Water base oil, UV oil, blister varnish oil, plastic oil 水性油, UV油, 吸塑油			
Powder remover unit	除粉机组可选	Dimension: 1500x1600x1500mm; Weight:500kg;			

瑞安市嘉利特印刷包装机械有限公司

SGZ-II-1200 Automatic UV Oil coating machine

② 自动双机座上光过油机




SUITABLE PAPER THICKNESS 80-500 gms



← MAIN TECHNICAL PARAMETERS 主要技术参数

型	号	Model	SGZ-II-1200 Automatic (Air knife
纸张	最大尺寸	Max paper size-mm	1150×1100
纸张	最小尺寸	Min paper size-mm	390×320
辊筒长度		Length of Roller	1250mm
纸张	厚度	Paper Thickness-g/m ²	80-600
电	压	Voltage	380V 50Hz 3P
待机	功率	Total standby power-kw	80kw

红外灯管	Infrared Heating Power	1.2kw×18pcs
紫外灯管	Ultraviolet Heating Power	3×8kw or 2×8kw
机器重量	Machine Weight-kg	8000
机器尺寸	Overall Dimension-mm	19000×2000×1700
油品类型	Oil type	Water base oil, UV oil, blister varnish oil, plastic oil 水性油,UV油,吸塑油
除粉机组可选	Powder remover unit	Dimension: 1500x1600x1500mm; Weight:500kg;

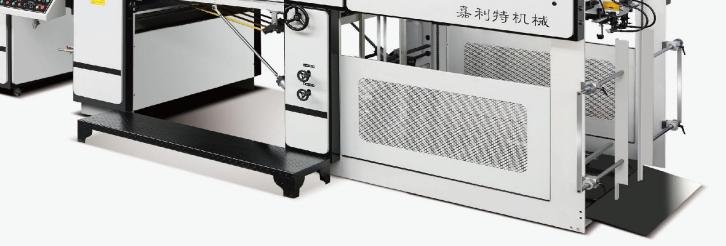

Appreciate for your reasing, welcome to get your rich suggestion, hope developping together! The good impression is form GREAT machinery.	感谢您的耐心阅读,欢迎来电或来邮提供您对嘉利特公司宝贵的建议 希望共同成长。美好的"印"象来自嘉利特机械
Great Machinery, Supply Good Quality Machine And Perfect Solution To You!	嘉利特机械为您提供优质的设备及完美的方案
	hope developping together! The good impression is form GREAT machinery.